

ATTACHMENTS



WWW.GIANT-ATTACHMENTS.COM

MAKE IT PERSONAL!



1 COLOUR*



2 COLOURS*



BLACK EDITION
(CARBON-LOOK)*

MORE INFO?
ASK YOUR NEAREST DEALER
OR VISIT OUR WEBSITE

WWW.TOBROCO.COM




team **TOBROCO**

Industrielaan 2
5061 KC Oisterwijk
The Netherlands
tel: +31 (0)13-5211212
fax: +31 (0)13-5234045
www.tobroco.com
info@tobroco.com



GIANT

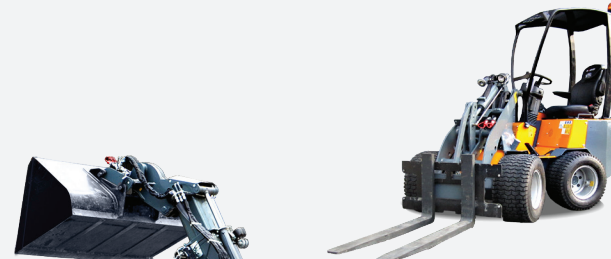

NL Motor
EN Engine
DU Motor
FR Moteur

NL Aandrijving
EN Transmission
DU Antrieb
FR Transmission

NL Rijsnelheid
EN Vehicle speed
DU Fahrgeschwindigkeit
FR Vitesse

NL Werkhydrauliek
EN Work hydraulic
DU Arbeitshydraulik
FR Hydraulique de travail

NL Kiplast¹ / Hefvermogen / Gewicht²
EN Tipping load¹ / Lift capacity / Mass²
DU Kipplast¹ / Hubkraft / Gewicht²
FR Charge de basculement¹ / Force de levage / Poids²

NL Parkeerrem
EN Parking brake
DU Feststellbremse
FR Frein à main

NL Diesel inhoud / Olie inhoud
EN Diesel capacity / Oil capacity
DU Füllmengen Krafstoff / Füllmengen Hydrauliköl
FR Contenu gazole / Contenu hydr

NL Snelwissel
EN Attachment bracket
DU Schnellwechsel
FR Changement rapide

NL Banden (voertuig breedte)
EN Tyres (vehicle width)
DU Reifen (maschinen breite)
FR Pneus (échelle de l'ordinateur)



NL Standaard uitgevoerd met
EN Standard equipped with
DU Standard mit
FR Standard avec

NL ¹ Gemeten op scharnierpunt in rechte stand
EN ¹ Measured on hinge point in straight position
DU ¹ Gemeten met grondbak en bestuurder
FR ¹ Mesurée sur les axes de godet en position droit

NL ² Gemeten met grondbak en bestuurder
EN ² Measured with standard bucket and driver
DU ² Gemeten mit Erdschaufel und Fahrer
FR ² Mesurée avec godet à terre et conducteur

Gegevens zijn onder voorbehoud / Data is subject to change
Irrtümer und Änderungen vorbehalten / Erreurs et sous réserve de modification
Version 214

	D204SW	D254SW	D204SW TELE	D254SW TELE	D243S	D263S	D332ST	D263SW	D263SW X-TRA	D332SWT	D332SWT X-TRA	D267	D337T	V362	V452T	V452T X-TRA	V452T HD	V452T X-TRA HD	V4502T	V4502T X-TRA		V5003	V5003 X-TRA	V5003T	V5003T X-TRA	V6004T	V6004T X-TRA	V5003 TELE	V6004T TELE	V501	V761T	V761T TELE	3648 TENDO	4548 TENDO HD																																									
A	1230	1230	1247	1247	1368	1368	1368	1368	1419	1368	1419	1515	1515	1643	1643	1695	1643	1695	1831	1831		1831	1831	1831	1831	1831	1831	1911	1911	2160	2160	2265	1950	1950	A																																								
B	2211	2211	2265	2265	2669	2669	2669	2669	2718	2669	2718	2975	2975	3247	3247	3316	3247	3316	3790	3690		3790	3690	3790	3690	3790	3690	3997	3997	4796	4796	4970	3135	3135	B																																								
C	2911	2911	2927	2927	3360	3360	3360	3360	3389	3360	3389	3690	3690	4015	4015	4085	4015	4085	4525	4525		4525	4525	4525	4525	4525	4525	4818	4818	5720	5720	5895	3850	3850	C																																								
D	--	--	--	--	622	622	622	622	622	622	622	622	622	540	540	540	540	540	540	540		540	540	540	540	540	540	540	540	--	--	--	3725	3725	D																																								
E	--	--	--	--	74	74	74	74	74	74	74	134	134	253	253	253	253	253	253	253		253	253	253	253	253	253	253	253	--	--	--	540	540	E																																								
F	--	--	--	--	737	737	737	737	737	737	737	797	797	652	652	652	652	652	652	652		652	652	652	652	652	652	652	652	--	--	--	253	253	F																																								
G	1020	1020	1020	1020	1136	1136	1136	1136	1136	1136	1136	1256	1256	1296	1341	1341	1341	1341	1225	1225		1225	1225	1225	1225	1270	1270	1225	1270	1545	1545	1545	850	850	G																																								
H	2060	2060	2060	2060	2165	2165	2165	2230	2230	2230	2230	2300	2300	2277	2322	2322	2322	2322	2275	2275		2275	2275	2275	2275	2320	2320	2275	2275	--	--	--	1970	1970	H																																								
I	--	--	--	--	--	--	--	--	--	--	--	--	--	2300	2345	2345	2345	2345	2242	2242		2242	2242	2242	2242	2287	2287	2242	2242	2631	2631	2631	1970	1970	I																																								
J	1380	1380	1310	1310	1535	1535	1535	1550	1148	1550	1148	1480	1480	1686	1731	1492	1731	1492	1711	1680		1711	1680	1711	1680	1711	1680	1736	1736	1660	1660	1850	--	--	J																																								
K	1408	1408	2060	2060	1827	1827	1827	1827	1360	1827	1360	1988	1988	2099	2144	1735	2144	1735	2449	1800		2449	1800	2449	1800	2494	1845	2477/3102	2477/3102	2370	2370	3030/4180	2870/4100	2870/4100	K																																								
L	2170	2170	2740	2740	2558	2558	2558	2558	2067	2558	2067	2825	2825	2919	2964	2498	2964	2498	3247	2658		3247	2658	3247	2658	3292	2703	3379/4312	3379/4312	3400	3400	3970/5155	3600/4800	3600/4800	L																																								
M	2976	2976	3300	3300	3138	3138	3138	3138	2641	3138	2641	3392	3392	3487	3532	3070	3532	3070	3753	3244		3753	3244	3753	3244	3798	3244	4004/4937	4004/4937	4215	4215	4835/5985	4270/5500	4170/5500	M																																								
N	43°	43°	43°	43°	41°	41°	41°	41°	44°	41°	44°	43°	43°	43°	43°	42°	43°	42°	41°	41°		41°	41°	41°	41°	41°	41°	41°	41°	41°	42°	42°	42°	45°	45°	N																																							
O	45°	45°	50°	50°	52°	52°	52°	52°	55°	52°	55°	53°	53°	45°	45°	47°	45°	47°	57°	44°		57°	44°	57°	44°	57°	44°	47°	47°	44°	44°	44°	51°	51°	O																																								
P	46°	46°	40°	40°	44°	44°	44°	44°	41°	44°	41°	47°	47°	43°	43°	37°	43°	37°	43°	47°		43°	47°	43°	47°	43°	47°	40°	40°	46°	46°	41°	33°	33°	P																																								
Q	34°	34°	34°	34°	27°	27°	27°	27°	27°	27°	27°	29°	29°	28°	28°	28°	28°	28°	30°	30°		30°	30°	30°	30°	30°	30°	30°	30°	30°	28°	28°	28°	30°	30°	Q																																							
R	Ø 570	Ø 570	Ø 570	Ø 570	Ø 670	Ø670	Ø670	Ø670	Ø670	Ø670	Ø670	Ø760	Ø760	Ø760	Ø850	Ø850	Ø850	Ø850	Ø850	Ø850		Ø850	Ø850	Ø850	Ø850	Ø940	Ø940	Ø850	Ø850	Ø1050	Ø1050	Ø1050	Ø760	Ø760	R																																								
1A	2225	2225	2225	2225	2257	2257	2257	2257	2469	2257	2469	2599	2599	2972	2972	3045	2972	3045	3281	3281		3281	3281	3281	3281	3281	3281	3281	3281	3281	3281	4235	4235	4335	3400	3400	1A																																						
1B	1967	1967	1967	1967	1900	1900	1900	1900	2263	1900	2263	2292	2292	2560	2560	2623	2560	2623	2859	2859		2859	2859	2859	2859	2859	2859	2859	2859	2859	2859	3650	3650	3745	2700	2700	1B																																						
1C	978	978	978	978	1040	1040	1040	1040	1163	1040	1163	1179	1179	1460	1460	1523	1460	1523	1476	1476		1476	1476	1476	1476	1476	1476	1476	1476	1476	1476	1520	1520	1620	1200	1200	1C																																						
1D	920	920	920	920	890	890	890	890	1100	890	1100	1040	1040	1070	1100	1100	1100	1100	1400	1400		1400	1400	1400	1400	1400	1400	1400	1400	1520	1585	1585	1585	1570	1570	1D																																							
Kieplasten in rechte stand gemeten zonder contragewicht - Tipping load in straight position, without additional counterweights																																						Kipplasten gerade gemessen ohne optionele Heckgewichten - Charges de basculement en position droite mesurée sans contrepoids																																					
S	1000 kg	1000 kg	--	--	1040 kg	1040 kg	1060 kg	1040 kg	1500 kg	1060 kg	1500 kg	1430 kg	1450 kg	2000 kg	2050 kg	2600 kg	2200 kg	2700 kg	2000 kg	3530 kg		2030 kg	3550 kg	2030 kg	3550 kg	2200 kg	3800 kg	Zie diagram in de brochure See diagram in the product brochure Siehe Diagramm Broschüre Voir brochure diagramm			4350 kg	4350 kg	Zie diagram in de brochure See diagram in the product brochure Siehe Diagramm Broschüre Voir brochure diagramm		S																																								
T	800 kg	800 kg	--	--	799 kg	799 kg	810 kg	799 kg	1100 kg	810 kg	1100 kg	1220 kg	1250 kg	1550 kg	1580 kg	1850 kg	1620 kg	2000 kg	1950 kg	2700 kg		1980 kg	2720 kg	1980 kg	2720 kg	2250 kg	2850 kg				3900 kg	3900 kg				T																																							
U	550 kg	550 kg	--	--	580 kg	580 kg	590 kg	580 kg	750 kg	590 kg	750 kg	910 kg	950 kg	1050 kg	1100 kg	1320 kg	1200 kg	1400 kg	1450 kg	1990 kg		1470 kg	2010 kg	1470 kg	2010 kg	1685 kg	2200 kg				3250 kg	3250 kg				U																																							
V	410 kg	410 kg	--	--	430 kg	430 kg	435 kg	430 kg	550 kg	435 kg	550 kg	705 kg	745 kg	800 kg	850 kg	1050 kg	900 kg	1000 kg	1150 kg	1450 kg		1170 kg	1470 kg	1170 kg	1470 kg	1375 kg	1575 kg				2400 kg	2400 kg				V																																							
W	1480 kg	1480 kg	--	--	1376 kg	1376 kg	1400 kg	1376 kg	1500 kg	1400 kg	1500 kg	1975 kg	2000 kg	2400 kg	2525 kg	2700 kg	2650 kg	2800 kg	2700 kg	3800 kg		2720 kg	3820 kg	2720 kg	3820 kg	3150 kg	4100 kg				4600 kg	4600 kg				W																																							
X	840 kg	840 kg	--	--	833 kg	833 kg	850 kg	833 kg	900 kg	850 kg	900 kg	1250 kg	1270 kg	1550 kg	1600 kg	1700 kg	1700 kg	1800 kg	1920 kg	2450 kg		1950 kg	2460 kg	1950 kg	2460 kg	2275 kg	2650 kg				3600 kg	3600 kg				X																																							
Y	510 kg	510 kg	--	--	597 kg	597 kg	615 kg	597 kg	650 kg	615 kg	650 kg	970 kg	1000 kg	1100 kg	1150 kg	1250 kg	1250 kg	1380 kg	1450 kg	1640 kg		1470 kg	1660 kg	1470 kg	1660 kg	1800 kg	1880 kg			2700 kg	2700 kg			Y																																									

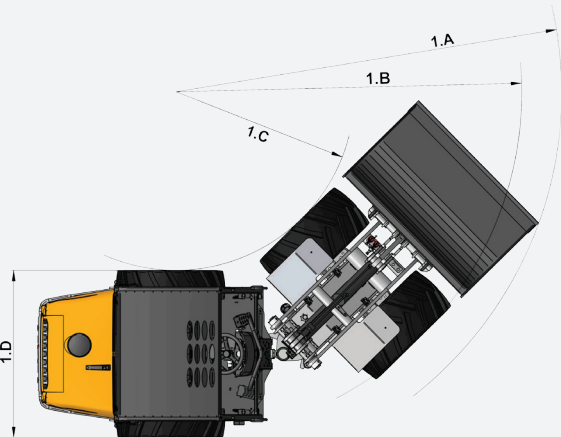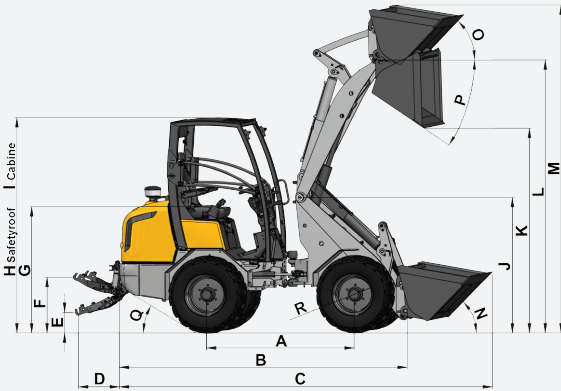

D204SW



20 pk / 15 kW	3 cilinder Kubota D722
20 hp / 15 kW	3 cylinder Kubota D722
20 PS / 15 kW	3 Zylinder Kubota D722
20 CV / 15 kW	3 cylindre Kubota D722

Hydraulisch 4WD met automotive pomp, Poclain wielmotoren
Hydraulic 4WD with automotive pump, Poclain wheel hub motors
Hydraulik 4WD mit Automotivpumpe, Poclain Radmotoren
Hydraulique 4WD avec pompe automotive, moteur-roue Poclain

0 - 15 km/h

28 L/min, 150 bar

1000 kg / 1100 kg / 1100 kg

Hydraulische lamellenrem, electrisch inschakelbaar
Hydraulic disc brake, electrically switchable
Hydraulischer Lamellenbremse, elektrisch schaltbar
Frein hydraulique à lamelles (commutable électriquement)

45 L / 52 L

Giant Compact	Mechanisch Mechanical Mechanisch Mécanique
---------------	---

23x8.50-12 AS (960 mm)	23x8.5-12 Skid/Grass (960 mm)	23x10.50-12 AS/Grass (1060 mm)
24x13-12 Grass (1220 mm)		

Wielmotoren met elektrische lengte sper functie
Wheel motor with electrically controlled lock function
Radmotoren mit elektrisch einschaltbarer Sperre
Moteur-roue avec verrouillage électrique

D254SW



25 pk / 18 kW
25 hp / 18 kW
25 PS / 18 kW
25 CV / 18 kW

3 cilinder Kubota D902
3 cylinder Kubota D902
3 Zylinder Kubota D902
3 cylindre Kubota D902

Hydraulisch 4WD met automotive besturing, Poclain wielmotoren
Hydraulic 4WD with automotive control, Poclain wheel hub motors
Hydraulik 4WD mit Automotiv Kontrolle, Poclain Radmotoren
Hydraulique 4WD avec commande automotive, moteur-roue Poclain

0 - 15 km/h

28 L/min, 150 bar

1000 kg / 1100 kg / 1100 kg

Hydraulische lamellenrem, elektrisch inschakelbaar
Hydraulic disc brake, electrically switchable
Hydraulischer Lamellenbremse, elektrisch schaltbar
Frein hydraulique à lamelles (commutable électriquement)

45 L / 52 L

GIANT Compact

Mechanisch
Mechanical
Mechanisch
Mécanique

23x8.50-12 AS (960 mm)

23x8.5-12 Skid/Grass (960 mm)

23x10.50-12 AS/Grass
(1060 mm)

24x13-12 Grass (1220 mm)

Wielmotoren met elektrische lengte sper functie
Wheel motor with electrically controlled lock function
Radmotoren mit elektrisch einschaltbarer Sperre
Moteur-roue avec verouillage électrique

D204SW TELE



20 pk / 15 kW
20 hp / 15 kW
20 PS / 15 kW
20 CV / 15 kW

3 cilinder Kubota D722
3 cylinder Kubota D722
3 Zylinder Kubota D722
3 cylindre Kubota D722

Hydraulisch 4WD met automotive pomp, Poclain wielmotoren
Hydraulic 4WD with automotive pump, Poclain wheel hub motors
Hydraulik 4WD mit Automotivpumpe, Poclain Radmotoren
Hydraulique 4WD avec pompe automotive, moteur-roue Poclain

0 - 15 km/h

28 L/min, 150 bar

-- / -- / 1200 kg

Hydraulische lamellenrem, elektrisch inschakelbaar
Hydraulic disc brake, electrically switchable
Hydraulischer Lamellenbremse, elektrisch schaltbar
Frein hydraulique à lamelles (commutable électriquement)

46 L / 52 L

GIANT Compact

Mechanisch
Mechanical
Mechanisch
Mécanique

23x8.50-12 AS (960 mm)

23x8.5-12 Skid/Grass (960 mm)

23x10.50-12 AS/Grass
(1060 mm)

24x13-12 Grass (1220 mm)

Wielmotoren met elektrische lengte sper functie, werk lamp voorzijde
Wheel motor with electrically controlled lock function, work light on front side
Radmotoren mit elektrisch einschaltbarer Sperre, Arbeitsscheinwerfer vor seite
Moteur-roue avec verouillage électrique, Phare de travail

D254SW TELE



25 pk / 18 kW	3 cilinder Kubota D902
25 hp / 18 kW	3 cylinder Kubota D902
25 PS / 18 kW	3 Zylinder Kubota D902
25 CV / 18 kW	3 cylindre Kubota D902

Hydraulisch 4WD met automotive besturing, Poclain wielmotoren
Hydraulic 4WD with automotive control, Poclain wheel hub motors
Hydraulik 4WD mit Automotiv Kontrolle, Poclain Radmotoren
Hydraulique 4WD avec commande automotive, moteur-roue Poclain

0 - 15 km/h

28 L/min, 150 bar

-- / -- / 1200 kg

Hydraulische lamellenrem, electrisch inschakelbaar
Hydraulic disc brake, electrically switchable
Hydraulischer Lamellenbremse, elektrisch schaltbar
Frein hydraulique à lamelles (commutable électriquement)

46 L / 52 L

Giant Compact	Mechanisch Mechanical Mechanisch Mécanique
---------------	---

23x8.50-12 AS (960 mm)	23x8.5-12 Skid/Grass (960 mm)	23x10.50-12 AS/Grass (1060 mm)
24x13-12 Grass (1220 mm)		

Wielmotoren met elektrische lengte sper functie
Wheel motor with electrically controlled lock function
Radmotoren mit elektrisch einschaltbarer Sperre
Moteur-roue avec verrouillage électrique

D243S



26 pk / 19 kW	3 cilinder Kubota D1105
26 hp / 19 kW	3 cylinder Kubota D1105
26 PS / 19 kW	3 Zylinder Kubota D1105
26 CV / 19 kW	3 cylindre Kubota D1105

Hydraulisch 4WD met axiale-plunjerpomp
Hydraulic 4WD with axial plunger pump
Hydraulik 4WD met Axialkolben pumpe
Hydraulique 4WD avec pompe axiale à piston plongeur

0 - 9 km/h

45 L/min, 180 bar

1040 kg / 1000 kg / 1400 kg

Trommelrem / mechanisch
Drum brake / mechanical
Trommelbremse / mechanisch
Frein à tambour / mécanique

25 L / 41 L

GIANT Standard	Hydraulisch Hydraulic Hydraulik Hydraulique
----------------	--

7.00x12 AS (890 mm)	27x8.5-15 Skid (970 mm)	26x12.00-12 AS/Skid/Grass (1100 mm)
300/60x12 X-trac (1100 mm)		

Werklamp voorzijde
Work light on front side
Arbeitsscheinwerfer vor seite
Phare de travail

D263S



26 pk / 19 kW
26 hp / 19 kW
26 PS / 19 kW
26 CV / 19 kW

3 cilinder Kubota D1105
3 cylinder Kubota D1105
3 Zylinder Kubota D1105
3 cylindre Kubota D1105

Hydraulisch 4WD met automotiv besturing
Hydraulic 4WD with automotive control
Hydraulik 4WD mit Automotiv Kontrolle
Hydraulique 4WD avec commande automotive

0 - 12 km/h

45 L/min, 180 bar

1040 kg / 1100 kg / 1480 kg

Trommelrem / mechanisch
Drum brake / mechanical
Trommelbremse / mechanisch
Frein à tambour / mécanique

25 L / 41 L

GIANT Standard

Hydraulisch
Hydraulic
Hydraulik
Hydraulique

7.00x12 AS (890 mm)

27x8.5-15 Skid (970 mm)

26x12.00-12 AS/Skid/Grass
(1100 mm)

300/60x12 X-trac (1100 mm)

Werklamp voorzijde
Work light on front side
Arbeitsscheinwerfer vor seite
Phare de travail

D332ST



33 pk / 24 kW	3 cilinder Kubota D1105-T
33 hp / 24 kW	3 cylinder Kubota D1105-T
33 PS / 24 kW	3 Zylinder Kubota D1105-T
33 CV / 24 kW	3 cylindre Kubota D1105-T

Hydraulisch 4WD met automotieve besturing
Hydraulic 4WD with automotive control
Hydraulik 4WD mit Automotiv Kontrolle
Hydraulique 4WD avec commande automotiv

0 - 12 km/h

45 L/min, 180 bar

1060 kg / 1100 kg / 1500 kg

Trommelrem / mechanisch
Drum brake / mechanical
Trommelbremse / mechanisch
Frein à tambour / mécanique

25 L / 41 L

GIANT Standard	Hydraulisch Hydraulic Hydraulik Hydraulique
----------------	--

7.00x12 AS (890 mm)	27x8.5-15 Skid (970 mm)	26x12.00-12 AS/Skid/Grass (1100 mm)
300/60x12 X-trac (1100 mm)		

Werklamp voorzijde
Work light on front side
Arbeitsscheinwerfer vor seite
Phare de travail

D263SW



26 pk / 19 kW	3 cilinder Kubota D1105
26 hp / 19 kW	3 cylinder Kubota D1105
26 PS / 19 kW	3 Zylinder Kubota D1105
26 CV / 19 kW	3 cylindre Kubota D1105

Hydraulisch 4WD met automotive besturing, Poclain wielmotoren
Hydraulic 4WD with automotive control, Poclain wheel hub motors
Hydraulik 4WD mit Automotiv Kontrolle, Poclain Radmotoren
Hydraulique 4WD avec commande automotive, moteur-roue Poclain

0 - 12 km/h

45 L/min, 180 bar

1040 kg / 1100 kg / 1480 kg

Hydraulische lamellenrem, electrisch inschakelbaar
Hydraulic disc brake, electrically switchable
Hydraulischer Lamellenbremse, elektrisch schaltbar
Frein hydraulique à lamelles (commutable électriquement)

25 L / 41 L

GIANT Standard	Hydraulisch Hydraulic Hydraulik Hydraulique	
7.00x12 AS (890 mm)	26x12.00-12 AS/Skid/Grass (1100 mm)	300/60x12 X-trac (1100 mm)
27x10.5-15 Skid (1030 mm)	31x15.5-15 AS/TR/Skid (1230 mm)	

Wielmotoren met elektrische lengte sper functie, werk lamp voorzijde
Wheel motor with electrically controlled lock function, work light on front side
Radmotoren mit elektr. einschaltbare Sperre, Arbeitsscheinwerfer vor seite
Moteur-roue avec longueur du différentiel de blocage réglable électriquement , Phare de travail

D263SW X-TRA



26 pk / 19 kW
26 hp / 19 kW
26 PS / 19 kW
26 CV / 19 kW

3 cilinder Kubota D1105
3 cylinder Kubota D1105
3 Zylinder Kubota D1105
3 cylindre Kubota D1105

Hydraulisch 4WD met automotive besturing, Poclain wielmotoren
Hydraulic 4WD with automotive control, Poclain wheel hub motors
Hydraulik 4WD mit Automotiv Kontrolle, Poclain Radmotoren
Hydraulique 4WD avec commande automotive, moteur-roue Poclain

0 - 12 km/h

45 L/min, 180 bar

1600 kg / 1400 kg / 1525 kg

Hydraulische lamellenrem, electrisch inschakelbaar
Hydraulic disc brake, electrically switchable
Hydraulischer Lamellenbremse, elektrisch schaltbar
Frein hydraulique à lamelles (commutable électriquement)

21 L / 41 L

GIANT Standard

Hydraulisch
Hydraulic
Hydraulik
Hydraulique

26x12.00-12 AS (1100 mm)

26x12.00-12 Skid/Grass
(1100 mm)

300/60x12 X-trac (1100 mm)

27x10.5-15 Skid (1030 mm)

31x15.5-15 AS/TR/Skid
(1230 mm)

Wielmotoren met elektrische lengte sper functie, werk lamp voorzijde
Wheel motor with electrically controlled lock function, work light on front side
Radmotoren mit elektr. einschaltbare Sperre, Arbeitsscheinwerfer vor seite
Moteur-roue avec longueur du différentiel de blocage réglable électriquement , Phare de travail

D332SWT



33 pk / 24 kW	3 cilinder Kubota D1105-T
33 hp / 24 kW	3 cylinder Kubota D1105-T
33 PS / 24 kW	3 Zylinder Kubota D1105-T
33 CV / 24 kW	3 cylindre Kubota D1105-T

Hydraulisch 4WD met automotive besturing, Poclain wielmotoren
Hydraulic 4WD with automotive control, Poclain wheel hub motors
Hydraulik 4WD mit Automotiv Kontrolle, Poclain Radmotoren
Hydraulique 4WD avec commande automotive, moteur-roue Poclain

0 - 12 km/h (option: 0 - 19 km/h)

45 L/min, 180 bar

1060 kg / 1100 kg / 1500 kg

Hydraulische lamellenrem, electrisch inschakelbaar
Hydraulic disc brake, electrically switchable
Hydraulischer Lamellenbremse, elektrisch schaltbar
Frein hydraulique à lamelles (commutable électriquement)

25 L / 41 L

GIANT Standard	Hydraulisch Hydraulic Hydraulik Hydraulique	
7.00x12 AS (890 mm)	26x12.00-12 AS/Skid/Grass (1100 mm)	300/60x12 X-trac (1100 mm)
27x10.5-15 Skid (1030 mm)	31x15.5-15 AS/TR/Skid (1230 mm)	

Wielmotoren met elektrische lengte sper functie, werk lamp voorzijde
Wheel motor with electrically controlled lock function, work light on front side
Radmotoren mit elektr. einschaltbare Sperre, Arbeitsscheinwerfer vor seite
Moteur-roue avec longueur du différentiel de blocage réglable électriquement , Phare de travail

D332SWT X-TRA



33 pk / 24 kW
33 hp / 24 kW
33 PS / 24 kW
33 CV / 24 kW

3 cilinder Kubota D1105-T
3 cylinder Kubota D1105-T
3 Zylinder Kubota D1105-T
3 cylindre Kubota D1105-T

Hydraulisch 4WD met automotive besturing, Poclain wielmotoren
Hydraulic 4WD with automotive control, Poclain wheel hub motors
Hydraulik 4WD mit Automotiv Kontrolle, Poclain Radmotoren
Hydraulique 4WD avec commande automotive, moteur-roue Poclain

0 - 12 km/h (option: 0 - 19 km/h)

45 L/min, 180 bar

1663 kg / 1400 kg / 1550 kg

Hydraulische lamellenrem, electrisch inschakelbaar
Hydraulic disc brake, electrically switchable
Hydraulischer Lamellenbremse, elektrisch schaltbar
Frein hydraulique à lamelles (commutable électriquement)

21 L / 41 L

GIANT Standard

Hydraulisch
Hydraulic
Hydraulik
Hydraulique

26x12.00-12 AS (1100 mm)	26x12.00-12 Skid/Grass (1100 mm)	300/60x12 X-trac (1100 mm)
27x10.5-15 Skid (1030 mm)	31x15.5-15 AS/TR/Skid (1230 mm)	

Wielmotoren met elektrische lengte sper functie, werk lamp voorzijde
Wheel motor with electrically controlled lock function, work light on front side
Radmotoren mit elektr. einschaltbare Sperre, Arbeitsscheinwerfer vor seite
Moteur-roue avec longueur du différentiel de blocage réglable électriquement , Phare de travail

D267



26 pk / 19 kW
26 hp / 19 kW
26 PS / 19 kW
26 CV / 19 kW

3 cilinder Kubota D1105
3 cylinder Kubota D1105
3 Zylinder Kubota D1105
3 cylindre Kubota D1105

Hydraulisch 4WD met automotiv besturing, cardan
Hydraulic 4WD with automotive control, drive shafts
Hydraulik 4WD mit Automotiv Kontrolle, Gelenkwelle
Hydraulique 4WD avec commande automotive, arbre de cardan

0 - 12 km/h

42 L/min, 180 bar

1400 kg / 1600 kg / 2000 kg

Trommelrem / mechanisch
Drum brake / mechanical
Trommelbremse / mechanisch
Frein à tambour / mécanique

37 L / 56 L

GIANT Standard

Hydraulisch
Hydraulic
Hydraulik
Hydraulique

10.0/75x15.3 AS (1040 mm) 7.5L-15 AS (smalle as) (960 mm) 31x15.5-15 AS/TR/Skid (1280 mm)
27x10.5-15 Skid (1160 mm)

Automatisch sperddifferentieel op beide assen, werklamp voorzijde
Automatic differential lock on both axles, work light on front side
Selbstsperrdifferential in beide Achsen, Arbeitsscheinwerfer vor seite
À l'aide d'essieux avec différentiel autobloquant sur les deux essieux , Phare de travail

D337T



33 pk / 24 kW	3 cilinder Kubota D1105-T
33 hp / 24 kW	3 cylinder Kubota D1105-T
33 PS / 24 kW	3 Zylinder Kubota D1105-T
33 CV / 24 kW	3 cylindre Kubota D1105-T

Hydraulisch 4WD met automotiv besturing, cardan
Hydraulic 4WD with automotiv control, drive shafts
Hydraulik 4WD mit Automotiv Kontrolle, Gelenkwelle
Hydraulique 4WD avec commande automotiv, arbre de cardan

0 - 18 km/h

42 L/min, 180 bar

1450 kg / 1650 kg / 2100 kg

Trommelrem / mechanisch
Drum brake / mechanical
Trommelbremse / mechanisch
Frein à tambour / mécanique

37 L / 56 L

GIANT Standard	Hydraulisch Hydraulic Hydraulik Hydraulique
----------------	--

10.0/75x15.3 AS (1040 mm)	7.5L-15 AS (smalle as) (960 mm)	31x15.5-15 AS/TR/Skid (1280 mm)
27x10.5-15 Skid (1160 mm)		

Automatisch sperddifferentieel op beide assen, werklamp voorzijde
Automatic differential lock on both axles, work light on front side
Selbstsperrdifferentiel in beide Achsen, Arbeitsscheinwerfer vor seite
À l'aide d'essieux avec différentiel autobloquant sur les deux essieux , Phare de travail

V362



36 pk / 26 kW
36 hp / 26 kW
36 PS / 26 kW
36 CV / 26 kW

4 cilinder Kubota V1505
4 cylinder Kubota V1505
4 Zylinder Kubota V1505
4 cylindre Kubota V1505

Hydraulisch 4WD met automotieve besturing, cardan
Hydraulic 4WD with automotive control, drive shafts
Hydraulik 4WD mit Automotiv Kontrolle, Gelenkwelle
Hydraulique 4WD avec commande automotive, arbre de cardan

0 - 18 km/h

51 L/min, 180 bar

2000 kg / 1750 kg / 2350 kg

Trommelrem / mechanisch
Drum brake / mechanical
Trommelbremse / mechanisch
Frein à tambour / mécanique

48 L / 48,5 L

GIANT Standard

Hydraulisch
Hydraulic
Hydraulik
Hydraulique

10.0/75x15.3 AS (1070 mm)

31x15.5-15 AS/TR/Skid
(1280 mm)

Automatisch sperddifferentieel op beide assen, werklamp voorzijde
Automatic differential lock on both axles, work light on front side
Selbstsperrdifferentiel in beide Achsen, Arbeitsscheinwerfer vor seite
À l'aide d'essieux avec différentiel autobloquant sur les deux essieux , Phare de travail

V452T



45 pk / 33 kW
45 hp / 33 kW
45 PS / 33 kW
45 CV / 33 kW

4 cilinder Kubota V1505-T
4 cylinder Kubota V1505-T
4 Zylinder Kubota V1505-T
4 cylindre Kubota V1505-T

Hydraulisch 4WD met automotive besturing, cardan, 8 tonnes assen, Planetaire eindaandrijving
Hydraulic 4WD with automotive control, drive shafts, 8 tonnes axles, Planetary end drive
Hydraulik 4WD mit Automotiv Kontrolle, Gelenkwelle, 8 tonnes Achse, Planetenachsen
Hydraulique 4WD avec commande automotive, arbre de cardan, 8 tonnes Essieux, Essieux planétaire

0 - 10 km/h / 0 - 20 km/h

51 L/min, 210 bar

2050 kg / 1750 kg / 2400 kg

Trommelrem / mechanisch
Drum brake / mechanical
Trommelbremse / mechanisch
Frein à tambour / mécanique

48 L / 48,5 L

GIANT Standard

Hydraulisch
Hydraulic
Hydraulik
Hydraulique

11.5/80x15.3 AS (1100 mm)

31x15.5-15 AS/TR/Skid
(1320 mm)

15.0/55x17 AS (1280 mm)

425/40 B17 GSP (1340 mm)

Automatisch sperddifferentieel op beide assen, werklamp voorzijde
Automatic differential lock on both axles, work light on front side
Selbstsperrdifferentiel in beide Achsen, Arbeitsscheinwerfer vor seite
À l'aide d'essieux avec différentiel autobloquant sur les deux essieux , Phare de travail

V452T X-TRA



45 pk / 33 kW
45 hp / 33 kW
45 PS / 33 kW
45 CV / 33 kW

4 cilinder Kubota V1505-T
4 cylinder Kubota V1505-T
4 Zylinder Kubota V1505-T
4 cylindre Kubota V1505-T

Hydraulisch 4WD met automotive besturing, cardan, 8 tonnes assen, Planetaire eindaandrijving
Hydraulic 4WD with automotive control, drive shafts, 8 tonnes axles, Planetary end drive
Hydraulik 4WD mit Automotiv Kontrolle, Gelenkwelle, 8 tonnes Achse, Planetenachsen
Hydraulique 4WD avec commande automotive, arbre de cardan, 8 tonnes Essieux, Essieux planétaire

0 - 10 km/h / 0 - 20 km/h

51 L/min, 210 bar

2600 kg / 2200 kg / 2400 kg

Trommelrem / mechanisch
Drum brake / mechanical
Trommelbremse / mechanisch
Frein à tambour / mécanique

30 L / 48,5 L

GIANT Standard

Hydraulisch
Hydraulic
Hydraulik
Hydraulique

11.5/80x15.3 AS (1100 mm)

31x15.5-15 AS/TR/Skid
(1320 mm)

15.0/55x17 AS (1280 mm)

425/40 B17 GSP (1340 mm)

Automatisch sperddifferentieel op beide assen, werklamp voorzijde
Automatic differential lock on both axles, work light on front side
Selbstsperrdifferentiel in beide Achsen, Arbeitsscheinwerfer vor seite
À l'aide d'essieux avec différentiel autobloquant sur les deux essieux , Phare de travail

V452T HD



45 pk / 33 kW
45 hp / 33 kW
45 PS / 33 kW
45 CV / 33 kW

4 cilinder Kubota V1505-T
4 cylinder Kubota V1505-T
4 Zylinder Kubota V1505-T
4 cylindre Kubota V1505-T

Hydraulisch 4WD met automotiv besturing, cardan, 12 tonnes assen, Planetaire eindaandrijving
Hydraulic 4WD with automotiv control, drive shafts, 12 tonnes axles, Planetary end drive
Hydraulik 4WD mit Automotiv Kontrolle, Gelenkwelle, 12 tonnes HD Achse, Planetenachsen
Hydraulique 4WD avec commande automotiv, arbre de cardan, Essieux HD 12 tonnes, Essieux planétaire

0 - 10 km/h / 0 - 28 km/h

Rijautomaat
Automatic transmission
Fahrautomaat
Transmission automatique

51 L/min, 210 bar

2200 kg / 1800 kg / 2770 kg

Trommelrem / mechanisch
Drum brake / mechanical
Trommelbremse / mechanisch
Frein à tambour / mécanique

47 L / 48,5 L

GIANT Standard

Hydraulisch
Hydraulic
Hydraulik
Hydraulique

11.5/80x15.3 AS (1100 mm)

31x15.5-15 AS/TR/Skid
(1340 mm)

15.0/55x17 AS (1300 mm)

420/55-17 AS (1390 mm)

19.0/45x17 AS (1480 mm)

425/40 B17 GSP (1375 mm)

500/40x17.5 Flota 3 (1620 mm)

Electr. inschakelbaar 100% sperdifferentieel op beide assen, werklamp voorzijde
100% electrically differential lock on both axles, work light on front side
Elektrisch einschaltbare 100% sperre in beiden Achsen, Arbeitsscheinwerfer vor seite
Electr. à l'écluse de différentiel de 100 % sur les deux axes, Phare de travail

V452T X-TRA HD



45 pk / 33 kW
45 hp / 33 kW
45 PS / 33 kW
45 CV / 33 kW

4 cilinder Kubota V1505-T
4 cylinder Kubota V1505-T
4 Zylinder Kubota V1505-T
4 cylindre Kubota V1505-T

Hydraulisch 4WD met automotiv besturing, cardan, 12 tonnes assen, Planetaire eindaandrijving
Hydraulic 4WD with automotiv control, drive shafts, 12 tonnes axles, Planetary end drive
Hydraulik 4WD mit Automotiv Kontrolle, Gelenkwelle, 12 tonnes HD Achse, Planetenachsen
Hydraulique 4WD avec commande automotiv, arbre de cardan, Essieux HD 12 tonnes, Essieux planétaire

0 - 10 km/h / 0 - 28 km/h

Rijautomaat
Automatic transmission
Fahrautomaat
Transmission automatique

51 L/min, 210 bar

2700 kg / 2250 kg / 2770 kg

Trommelrem / mechanisch
Drum brake / mechanical
Trommelbremse / mechanisch
Frein à tambour / mécanique

30 L / 48,5 L

GIANT Standard

Hydraulisch
Hydraulic
Hydraulik
Hydraulique

11.5/80x15.3 AS (1100 mm)	31x15.5-15 AS/TR/Skid (1340 mm)	15.0/55x17 AS (1300 mm)
420/55-17 AS (1390 mm)	19.0/45x17 AS (1480 mm)	425/40 B17 GSP (1375 mm)
500/40x17.5 Flota 3 (1620 mm)		

Electr. inschakelbaar 100% sperddifferentieel op beide assen, werklamp voorzijde
100% electrically differential lock on both axles, work light on front side
Elektrisch einschaltbare 100% sperre in beiden Achsen, Arbeitsscheinwerfer vor seite
Electr. à l'écluse de différentiel de 100 % sur les deux axes, Phare de travail



45 pk / 33 kW		4 cilinder Kubota V1505-T
45 hp / 33 kW		4 cylinder Kubota V1505-T
45 PS / 33 kW		4 Zylinder Kubota V1505-T
45 CV / 33 kW		4 cylindre Kubota V1505-T
Hydraulisch 4WD met automotive besturing, cardan, 12 tonnes assen, Planetaire eindaandrijving Hydraulic 4WD with automotive control, drive shafts, 12 tonnes axles, Planetary end drive Hydraulik 4WD mit Automotiv Kontrolle, Gelenkwelle, 12 tonnes HD Achse, Planetenachsen Hydraulique 4WD avec commande automotive, arbre de cardan, Essieux HD 12 tonnes, Essieux planétaire		
0 - 8 km/h / 0 - 25 km/h	Rijautomaat Automatic transmission Fahrautomaat Transmission automatique	
60 L/min, 190 bar		
2000 kg / 2460 kg / 3200 kg		
Trommelrem / mechanisch Drum brake / mechanical Trommelbremse / mechanisch Frein à tambour / mécanique		
68 L / 80 L		
GIANT Standard	Hydraulisch Hydraulic Hydraulik Hydraulique	
11.5/80x15.3 AS (1340 mm)	31x15.5-15 AS/TR/Skid (1470 mm)	15.0/55x17 AS (1520 mm)
420/55-17 AS (1590 mm)	19.0/45x17 AS (1620 mm)	445/45-R19.5 Kargo/GSP (1650 mm)
Electr. inschakelbaar 100% sperdifferentieel op beide assen, werklamp voorzijde 100% electrically differential lock on both axles, work light on front side Elektrisch einschaltbare 100% sperre in beiden Achsen, Arbeitsscheinwerfer vor seite Electr. à l'écluse de différentiel de 100 % sur les deux axes, Phare de travail		

V4502T X-TRA



45 pk / 33 kW
45 hp / 33 kW
45 PS / 33 kW
45 CV / 33 kW

4 cilinder Kubota V1505-T
4 cylinder Kubota V1505-T
4 Zylinder Kubota V1505-T
4 cylindre Kubota V1505-T

Hydraulisch 4WD met automotive besturing, cardan, 12 tonnes assen, Planetaire eindaandrijving
Hydraulic 4WD with automotive control, drive shafts, 12 tonnes axles, Planetary end drive
Hydraulik 4WD mit Automotiv Kontrolle, Gelenkwelle, 12 tonnes HD Achse, Planetenachsen
Hydraulique 4WD avec commande automotive, arbre de cardan, Essieux HD 12 tonnes, Essieux planétaire

0 - 10 km/h / 0 - 25 km/h

Rijautomaat
Automatic transmission
Fahrautomaat
Transmission automatique

56 L/min, 215 bar

3480 kg / 2880 kg / 3100 kg

Trommelrem / mechanisch
Drum brake / mechanical
Trommelbremse / mechanisch
Frein à tambour / mécanique

49 L / 80 L

GIANT Standard

Hydraulisch
Hydraulic
Hydraulik
Hydraulique

11.5/80x15.3 AS (1340 mm)

31x15.5-15 AS/TR/Skid
(1470 mm)

15.0/55x17 AS (1520 mm)

420/55-17 AS (1590 mm)

19.0/45x17 AS (1620 mm)

500/40x17.5 Flota 3 (1620 mm)

445/45-R19.5 Kargo/GSP
(1650 mm)

Electr. inschakelbaar 100% sperddifferentieel op beide assen, werklamp voorzijde
100% electrically differential lock on both axles, work light on front side
Elektrisch einschaltbare 100% sperre in beiden Achsen, Arbeitsscheinwerfer vor seite
Electr. à l'écluse de différentiel de 100 % sur les deux axes, Phare de travail

V5003



50 pk / 36 kW
50 hp / 36 kW
50 PS / 36 kW
50 CV / 36 kW

4 cilinder Kubota V2203
4 cylinder Kubota V2203
4 Zylinder Kubota V2203
4 cylindre Kubota V2203

Hydraulisch 4WD met automotiv besturing, cardan, 12 tonnes assen, Planetaire eindaandrijving
Hydraulic 4WD with automotiv control, drive shafts, 12 tonnes axles, Planetary end drive
Hydraulik 4WD mit Automotiv Kontrolle, Gelenkwelle, 12 tonnes HD Achse, Planetenachsen
Hydraulique 4WD avec commande automotiv, arbre de cardan, Essieux HD 12 tonnes, Essieux planétaire

0 - 10 km/h / 0 - 25 km/h

Rijautomaat
Automatic transmission
Fahrautomaat
Transmission automatique

56 L/min, 215 bar

2030 kg / 2480kg / 3300 kg

Trommelrem / mechanisch
Drum brake / mechanical
Trommelbremse / mechanisch
Frein à tambour / mécanique

68 L / 80 L

GIANT Standard

Hydraulisch
Hydraulic
Hydraulik
Hydraulique

11.5/80x15.3 AS (1340 mm)	31x15.5-15 AS/TR/Skid (1470 mm)	15.0/55x17 AS (1520 mm)
19.0/45x17 AS (1620 mm)	500/40x17.5 Flota 3 (1620 mm)	420/55-17 AS (1590 mm)
445/45-R19.5 Kargo/GSP (1650 mm)		

Electr. inschakelbaar 100% sperddifferentieel op beide assen, werklamp voorzijde
100% electrically differential lock on both axles, work light on front side
Elektrisch einschaltbare 100% sperre in beiden Achsen, Arbeitsscheinwerfer vor seite
Electr. à l'écluse de différentiel de 100 % sur les deux axes, Phare de travail

V5003 X-TRA



50 pk / 36 kW
50 hp / 36 kW
50 PS / 36 kW
50 CV / 36 kW

4 cilinder Kubota V2203
4 cylinder Kubota V2203
4 Zylinder Kubota V2203
4 cylindre Kubota V2203

Hydraulisch 4WD met automotieve besturing, cardan, 12 tonnes assen, Planetaire eindaandrijving
Hydraulic 4WD with automotive control, drive shafts, 12 tonnes axles, Planetary end drive
Hydraulik 4WD mit Automotiv Kontrolle, Gelenkwelle, 12 tonnes HD Achse, Planetenachsen
Hydraulique 4WD avec commande automotive, arbre de cardan, Essieux HD 12 tonnes, Essieux planétaire

0 - 10 km/h / 0 - 25 km/h

Rijautomaat
Automatic transmission
Fahrautomaat
Transmission automatique

56 L/min, 215 bar

3500 kg / 2900kg / 3100 kg

Trommelrem / mechanisch
Drum brake / mechanical
Trommelbremse / mechanisch
Frein à tambour / mécanique

49 L / 80 L

GIANT Standard

Hydraulisch
Hydraulic
Hydraulik
Hydraulique

11.5/80x15.3 AS (1340 mm)	31x15.5-15 AS/TR/Skid (1470 mm)	15.0/55x17 AS (1520 mm)
19.0/45x17 AS (1620 mm)	500/40x17.5 Flota 3 (1620 mm)	420/55-17 AS (1590 mm)
445/45-R19.5 Kargo/GSP (1650 mm)		

Electr. inschakelbaar 100% sperddifferentieel op beide assen, werklamp voorzijde
100% electrically differential lock on both axles, work light on front side
Elektrisch einschaltbare 100% sperre in beiden Achsen, Arbeitsscheinwerfer vor seite
Electr. à l'écluse de différentiel de 100 % sur les deux axes, Phare de travail

V5003T



60 pk / 44 kW
60 hp / 44 kW
60 PS / 44 kW
60 CV / 44 kW

4 cilinder Kubota V2403M-T
4 cylinder Kubota V2403M-T
4 Zylinder Kubota V2403M-T
4 cylindre Kubota V2403M-T

Hydraulisch 4WD met automotiv besturing, cardan, 12 tonnes assen, Planetaire eindaandrijving
Hydraulic 4WD with automotiv control, drive shafts, 12 tonnes axles, Planetary end drive
Hydraulik 4WD mit Automotiv Kontrolle, Gelenkwelle, 12 tonnes HD Achse, Planetenachsen
Hydraulique 4WD avec commande automotiv, arbre de cardan, Essieux HD 12 tonnes, Essieux planétaire

0 - 10 km/h / 0 - 25 km/h

Rijautomaat
Automatic transmission
Fahrautomaat
Transmission automatique

54 L/min, 215 bar

2030 kg / 2480 kg / 3300 kg

Trommelrem / mechanisch
Drum brake / mechanical
Trommelbremse / mechanisch
Frein à tambour / mécanique

68 L / 80 L

GIANT Standard

Hydraulisch
Hydraulic
Hydraulik
Hydraulique

11.5/80x15.3 AS (1340 mm)	31x15.5-15 AS/TR/Skid (1470 mm)	15.0/55x17 AS (1520 mm)
19.0/45x17 AS (1620 mm)	500/40x17.5 Flota 3 (1620 mm)	420/55-17 AS (1590 mm)
445/45-R19.5 Kargo/GSP (1650 mm)		

Electr. inschakelbaar 100% sperdifferentieel op beide assen, werklamp voorzijde
100% electrically differential lock on both axles, work light on front side
Elektrisch einschaltbare 100% sperre in beiden Achsen, Arbeitsscheinwerfer vor seite
Electr. à l'écluse de différentiel de 100 % sur les deux axes, Phare de travail

V5003T X-TRA



60 pk / 44 kW
60 hp / 44 kW
60 PS / 44 kW
60 CV / 44 kW

4 cilinder Kubota V2403M-T
4 cylinder Kubota V2403M-T
4 Zylinder Kubota V2403M-T
4 cylindre Kubota V2403M-T

Hydraulisch 4WD met automotiv besturing, cardan, 12 tonnes assen, Planetaire eindaandrijving
Hydraulic 4WD with automotiv control, drive shafts, 12 tonnes axles, Planetary end drive
Hydraulik 4WD mit Automotiv Kontrolle, Gelenkwelle, 12 tonnes HD Achse, Planetenachsen
Hydraulique 4WD avec commande automotiv, arbre de cardan, Essieux HD 12 tonnes, Essieux planétaire

0 - 10 km/h / 0 - 25 km/h

Rijautomaat
Automatic transmission
Fahrautomaat
Transmission automatique

54 L/min, 215 bar

3500 kg / 2900 kg / 3100 kg

Trommelrem / mechanisch
Drum brake / mechanical
Trommelbremse / mechanisch
Frein à tambour / mécanique

49 L / 80 L

GIANT Standard

Hydraulisch
Hydraulic
Hydraulik
Hydraulique

11.5/80x15.3 AS (1340 mm)	31x15.5-15 AS/TR/Skid (1470 mm)	15.0/55x17 AS (1520 mm)
19.0/45x17 AS (1620 mm)	500/40x17.5 Flota 3 (1650 mm)	420/55-17 AS (1590 mm)
445/45-R19.5 Kargo/GSP (1650 mm)		

Electr. inschakelbaar 100% sperdifferentieel op beide assen, werklamp voorzijde
100% electrically differential lock on both axles, work light on front side
Elektrisch einschaltbare 100% sperre in beiden Achsen, Arbeitsscheinwerfer vor seite
Electr. à l'écluse de différentiel de 100 % sur les deux axes, Phare de travail

V6004T



60 pk / 44 kW
60 hp / 44 kW
60 PS / 44 kW
60 CV / 44 kW

4 cilinder Kubota V2403M-T
4 cylinder Kubota V2403M-T
4 Zylinder Kubota V2403M-T
4 cylindre Kubota V2403M-T

Hydraulisch 4WD met automotiv besturing, cardan, 14 tonnes HD assen, Planetaire eindaandrijving
Hydraulic 4WD with automotiv control, drive shafts, 14 tonnes HD axles, Planetary end drive
Hydraulik 4WD mit Automotiv Kontrolle, Gelenkwelle, 14 tonnes HD Achse, Planetenachsen
Hydraulique 4WD avec commande automotiv, arbre de cardan, Essieux HD 14 tonnes, Essieux planétaire

0 - 10 km/h / 0 - 28 km/h

Rijautomaat
Automatic transmission
Fahrautomaat
Transmission automatique

54 L/min, 215 bar

2200 kg / 2500 kg / 3400 kg

Trommelrem / mechanisch
Drum brake / mechanical
Trommelbremse / mechanisch
Frein à tambour / mécanique

68 L / 80 L

GIANT Standard

Hydraulisch
Hydraulic
Hydraulik
Hydraulique

12.0/75x18 TR-11 (1400 mm)	31x15.5-15 AS/TR/Skid (1500 mm)	15.0/55x17 AS (1520 mm)
420/55-17 AS (1590 mm)	19.0/45x17 AS (1620 mm)	500/40x17.5 Flota 3 (1650 mm)
445/45-R19.5 Kargo/GSP (1650 mm)	500/45x20 AS (1650 mm)	

Electr. inschakelbaar 100% sperdifferentieel op beide assen, werklamp voorzijde
100% electrically differential lock on both axles, work light on front side
Elektrisch einschaltbare 100% sperre in beiden Achsen, Arbeitsscheinwerfer vor seite
Electr. à l'écluse de différentiel de 100 % sur les deux axes, Phare de travail

V6004T X-TRA



60 pk / 44 kW
60 hp / 44 kW
60 PS / 44 kW
60 CV / 44 kW

4 cilinder Kubota V2403M-T
4 cylinder Kubota V2403M-T
4 Zylinder Kubota V2403M-T
4 cylindre Kubota V2403M-T

Hydraulisch 4WD met automotiv besturing, cardan, 14 tonnes HD assen, Planetaire eindaandrijving
Hydraulic 4WD with automotive control, drive shafts, 14 tonnes HD axles, Planetary end drive
Hydraulik 4WD mit Automotiv Kontrolle, Gelenkwelle, 14 tonnes HD Achse, Planetenachsen
Hydraulique 4WD avec commande automotiv, arbre de cardan, Essieux HD 14 tonnes, Essieux planétaire

0 - 10 km/h / 0 - 28 km/h

Rijautomaat
Automatic transmission
Fahrautomaat
Transmission automatique

54 L/min, 215 bar

3800 kg / 2920 kg / 3300 kg

Trommelrem / mechanisch
Drum brake / mechanical
Trommelbremse / mechanisch
Frein à tambour / mécanique

49 L / 80 L

GIANT Standard

Hydraulisch
Hydraulic
Hydraulik
Hydraulique

12.0/75x18 TR-11 (1400 mm)	31x15.5-15 AS/TR/Skid (1500 mm)	15.0/55x17 AS (1520 mm)
420/55-17 AS (1590 mm)	19.0/45x17 AS (1620 mm)	500/40x17.5 Flota 3 (1650 mm)
445/45-R19.5 Kargo/GSP (1650 mm)	500/45x20 AS (1650 mm)	

Electr. inschakelbaar 100% sperdifferentieel op beide assen, werklamp voorzijde
100% electrically differential lock on both axles, work light on front side
Elektrisch einschaltbare 100% sperre in beiden Achsen, Arbeitsscheinwerfer vor seite
Electr. à l'écluse de différentiel de 100 % sur les deux axes, Phare de travail

V5003 TELE



50 pk / 36 kW
50 hp / 36 kW
50 PS / 36 kW
50 CV / 36 kW

4 cilinder Kubota V2203
4 cylinder Kubota V2203
4 Zylinder Kubota V2203
4 cylindre Kubota V2203

Hydraulisch 4WD met automotive besturing, cardan, 12 tonnes assen, Planetaire eindaandrijving
Hydraulic 4WD with automotive control, drive shafts, 12 tonnes axles, Planetary end drive
Hydraulik 4WD mit Automotiv Kontrolle, Gelenkwelle, 12 tonnes HD Achse, Planetenachsen
Hydraulique 4WD avec commande automotive, arbre de cardan, Essieux HD 12 tonnes, Essieux planétaire

0 - 10 km/h / 0 - 25 km/h

Rijautomaat
Automatic transmission
Fahrautomaat
Transmission automatique

70 L/min, 215 bar

1000 kg - 2000 kg / 2000 kg / 3750 kg

Trommelrem / mechanisch
Drum brake / mechanical
Trommelbremse / mechanisch
Frein à tambour / mécanique

82 L / 80 L

GIANT Standard

Hydraulisch
Hydraulic
Hydraulik
Hydraulique

11.5/80x15.3 AS (1340 mm)	31x15.5-15 AS/TR/Skid (1470 mm)	15.0/55x17 AS (1520 mm)
420/55-17 AS (1590 mm)	19.0/45x17 AS (1620 mm)	500/40x17.5 Flota 3 (1620 mm)
500/45x20 AS (1650 mm)	445/45-R19.5 Kargo/GSP (1650 mm)	

Electr. inschakelbaar 100% sperddifferentieel op beide assen, werkklamp voorzijde
100% electrically differential lock on both axles, work light on front side
Elektrisch einschaltbare 100% sperre in beiden Achsen, Arbeitsscheinwerfer vor seite
Electr. à l'écluse de différentiel de 100 % sur les deux axes, Phare de travail

V6004T TELE



60 pk / 44 kW	4 cilinder Kubota V2403M-T
60 hp / 44 kW	4 cylinder Kubota V2403M-T
60 PS / 44 kW	4 Zylinder Kubota V2403M-T
60 CV / 44 kW	4 cylindre Kubota V2403M-T

Hydraulisch 4WD met automotieve besturing, cardan, 14 tonnes HD assen, Planetaire eindaandrijving
Hydraulic 4WD with automotive control, drive shafts, 14 tonnes HD axles, Planetary end drive
Hydraulik 4WD mit Automotiv Kontrolle, Gelenkwelle, 14 tonnes HD Achse, Planetenachsen
Hydraulique 4WD avec commande automotive, arbre de cardan, Essieux HD 14 tonnes, Essieux planétaire

0 - 10 km/h / 0 - 28 km/h	Rijautomaat Automatic transmission Fahrautomaat Transmission automatique
---------------------------	---

67,5 L/min, 215 bar

1000 kg - 2000 kg / 2000 kg / 3850 kg

Trommelrem / mechanisch
Drum brake / mechanical
Trommelbremse / mechanisch
Frein à tambour / mécanique

82 L / 80 L

GIANT Standard	Hydraulisch Hydraulic Hydraulik Hydraulique
----------------	--

15.0/55x17 AS (1520 mm)	420/55-17 AS	19.0/45x17 AS (1620 mm)
500/40x17.5 Flota 3 (1650 mm)	500/45x20 AS (1650 mm)	445/45-R19.5 Kargo/GSP (1650 mm)

Electr. inschakelbaar 100% sperddifferentieel op beide assen, werklamp voorzijde
100% electrically differential lock on both axles, work light on front side
Elektrisch einschaltbare 100% sperre in beiden Achsen, Arbeitsscheinwerfer vor seite
Electr. à l'écluse de différentiel de 100 % sur les deux axes, Phare de travail

V501



50 pk / 36 kW
50 hp / 36 kW
50 PS / 36 kW
50 CV / 36 kW

4 cilinder DEUTZ D 2.9 L04
4 cylinder DEUTZ D 2.9 L04
4 Zylinder DEUTZ D 2.9 L04
4 cylindre DEUTZ D 2.9 L04

Hydraulisch 4WD met automotiv besturing, cardan, 16 tonnes assen, Planetaire eindaandrijving
Hydraulic 4WD with automotiv control, drive shafts, 16 tonnes axles, Planetary end drive
Hydraulik 4WD mit Automotiv Kontrolle, Gelenkwelle, 16 tonnes HD Achse, Planetenachsen
Hydraulique 4WD avec commande automotiv, arbre de cardan, Essieux HD 16 tonnes, Essieux planétaire

0 - 25 km/h

Rijautomaat
Automatic transmission
Fahrautomaat
Transmission automatique

80 L/min, 250 bar

-- / -- / 5600 kg

Hydraulische lamellenrem
Hydraulic disc brake
Hydraulische Scheibenbremse
Frein à disque Hydraulique

105 L / 120 L

GIANT Large

Hydraulisch
Hydraulic
Hydraulik
Hydraulique

405/70-20 16PR MPT-01 AS
(1800 mm)
500/45-22,5 GSP (1890 mm)

12,5-20 MPT-01 (1720 mm)

405/70-20 143 EM 01 TL
(1800 mm)

Standaard cabine met 4 werkampen
Standard cabine with 4 work lights
Standard-Kabine mit 4 Arbeitsscheinwerfer
Cabine standard avec 4 phares de travail

V761T



76 pk / 55,6 kW
76 hp / 55,6 kW
76 PS / 55,6 kW
76 CV / 55,6 kW

4 cilinder DEUTZ TD 2.9 L04 Stage III B TIER 4 Final
4 cylinder DEUTZ TD 2.9 L04 Stage III B TIER 4 Final
4 Zylinder DEUTZ TD 2.9 L04 Stage III B TIER 4 Final
4 cylindre DEUTZ TD 2.9 L04 Stage III B TIER 4 Final

Hydraulisch 4WD met automotiv besturing, cardan, 16 tonnes assen, Planetaire eindaandrijving
Hydraulic 4WD with automotiv control, drive shafts, 16 tonnes axles, Planetary end drive
Hydraulik 4WD mit Automotiv Kontrolle, Gelenkwelle, 16 tonnes HD Achse, Planetenachsen
Hydraulique 4WD avec commande automotiv, arbre de cardan, Essieux HD 16 tonnes, Essieux planétaire

0 - 25 km/h (option: 0 - 35 km/h)

Rijautomaat
Automatic transmission
Fahrautomaat
Transmission automatique

80 L/min, 250 bar

-- / -- / 5600 kg

Hydraulische lamellenrem
Hydraulic disc brake
Hydraulische Scheibenbremse
Frein à disque Hydraulique

105 L / 120 L

GIANT Large

Hydraulisch
Hydraulic
Hydraulik
Hydraulique

405/70-20 16PR MPT-01 AS (1800 mm)	12,5-20 MPT-01 (1720 mm)	405/70-20 143 EM 01 TL (1800 mm)
500/45-22,5 GSP (1890 mm)	600/40-22,5 TR12 (2080 mm)	

Standaard cabine met 4 werklampen
Standard cabine with 4 work lights
Standard-Kabine mit 4 Arbeitsscheinwerfer
Cabine standard avec 4 phares de travail

3648 TENDO



36 pk / 26 kW
36 hp / 26 kW
36 PS / 26 kW
36 CV / 26 kW

4 cilinder Kubota V1505
4 cylinder Kubota V1505
4 Zylinder Kubota V1505
4 cylindre Kubota V1505

Hydraulisch 4WD met automotiv besturing, cardan, 8 tonnes assen, Planetaire eindaandrijving
Hydraulic 4WD with automotiv control, drive shafts, 8 tonnes axles, Planetary end drive
Hydraulik 4WD mit Automotiv Kontrolle, Gelenkwelle, 8 tonnes Achse, Planetenachsen
Hydraulique 4WD avec commande automotiv, arbre de cardan, Essieux 8 tonnes, Essieux planétaire

0 - 7 km/h / 0 - 25 km/h

Rijautomaat
Automatic transmission
Fahrautomaat
Transmission automatique

51 L/min, 230 bar

800 kg - 1400 kg / 1400 kg / 2950 kg

Schijfrem
Disc brake
Scheibenbremse
Frein à disque

38 L / 53 L

GIANT Standard

Hydraulisch
Hydraulic
Hydraulik
Hydraulique

10.0/75-15.3 AS (1600 mm)

31x15.5-15 AS/TR/Skid
(1600 mm)

425/40 B17 GSP (1680 mm)

Hefhoogte 4800 mm, werklamp voorzijde
Lift height 4800 mm, work light on front side
Hubhöhe 4800 mm, Arbeitsscheinwerfer vor seite
Hauteur de levage 4800 mm, Phare de travail

4548 TENDO HD



45 pk / 33 kW
45 hp / 33 kW
45 PS / 33 kW
45 CV / 33 kW

4 cilinder Kubota V1505-T
4 cylinder Kubota V1505-T
4 Zylinder Kubota V1505-T
4 cylindre Kubota V1505-T

Hydraulisch 4WD met automotieve besturing, cardan, 8 tonnes HD assen, Planetaire eindaandrijving
Hydraulic 4WD with automotive control, drive shafts, 8 tonnes HD axles, Planetary end drive
Hydraulik 4WD mit Automotiv Kontrolle, Gelenkwelle, 8 tonnes HD Achsen, Planetenachsen
Hydraulique 4WD avec commande automotive, arbre de cardan, Essieux HD 8 tonnes, Essieux planétaire

0 - 7 km/h / 0 - 25 km/h

Rijautomaat
Automatic transmission
Fahrautomaat
Transmission automatique

51 L/min, 230 bar

800 kg - 1400 kg / 1400 kg / 2950 kg

Schijfrem
Disc brake
Scheibenbremse
Frein à disque

38 L / 53 L

GIANT Standard

Hydraulisch
Hydraulic
Hydraulik
Hydraulique

10.0/75-15.3 AS (1600 mm)

31x15.5-15 AS/TR/Skid
(1600 mm)

425/40 B17 GSP (1680 mm)

Heffhoogte 4800 mm, werklamp voorzijde
Lift height 4800 mm, work light on front side
Hubhöhe 4800 mm, Arbeitsscheinwerfer vor seite
Hauteur de levage 4800 mm, Phare de travail

PRO-INCHING D263S T/M V6004T TELE

NL Met de hendel wordt het toerental geregeld en met het pedaal kan de rijsnelheid comfortabel geregeld worden.

EN Control the torque with the lever while comfortably controlling the speed with the pedal.

DU Steuern das Drehmoment mit dem Hebel und steuern bequem die Geschwindigkeit mit dem Pedal.

FR Contrôler le couple avec le levier et de la vitesse avec aisance par pédale.



WORKS WELL WITH:



SWEEPERS



MOWERS

PATENTED STABILO SYSTEM D263S T/M V452T X-TRA HD

NL Stabiliseert de pendelwerking van de machine en biedt u meer comfort bij ongelijk terrein.

EN Stabilizes the oscillating operation of the machine and provides more comfort on uneven terrain.

DU Stabilisiert das Pendel Maschinenbedienung, verhindert Kippen und gibt Ihnen mehr Komfort auf unebenem Gelände.


FR Stabilise les mouvements pendulaires de la machine, évite le basculement et vous donne plus de confort sur un terrain accidenté.




ATTACHMENT BRACKET



**GIANT COMPACT
MECH. / HYDR.**



**GIANT STANDARD
HYDR.**



**GIANT LARGE
HYDR.**

**OPTIONAL AVAILABLE:
EURO, EURO-SMS, SMS 75, SMS 90, SKIDSTEER
AND MORE...**

ROPS/FOPS FOLDABLE SAFETY ROOF DELUXE D263S T/M V452T X-TRA HD

NL Neerklapbaar veiligheidsdak optioneel (34 cm lager)

EN Foldable safety roof, optional (34 cm lower)

DU Klappbarer sicherheitsverdeck optional (34 cm niedriger)

FR Canopy de sécurité repliable en option (34 cm de moins)



ROPS/FOPS CABIN SW(T) SW(T)-XTRA CABINES



X 4



X 2



Geluidisolatie
Soundproofing
Schalldämpfung
Insonorisation



X 2



PICK YOUR CABIN



AIRCO OPTION V4502T T/M V761T



23x8.5-12 AS
(58 x 21 cm)



23x8.5-12 Skid
(58 x 21 cm)



23x8.5-12 Grass
(58 x 21 cm)



23x10.5-12 AS
(58 x 21 cm)



23x10.5-12 Grass
(58 x 21 cm)



24x13-12 Grass
(58 x 26 cm)



7.00x12 AS
(67 x 20 cm)



27x8.5-15 Skid
(67 x 23 cm)



26x12.00-12 AS
(66 x 30 cm)



26x12.00-12 Skid
(66 x 30 cm)



26x12.00-12 Grass
(66 x 30 cm)



300/60x12 X-Trac
(66 x 30 cm)



10.0/75-15.3 AS
(76 x 26 cm)



27x10.5-15 Skid
(67 x 27 cm)



7.5Lx15 AS
(76 x 21 cm)



11.5/80x15 AS
(85 x 29 cm)



31x15.5-15 AS
(80 x 37 cm)



31x15.5-15 Skid
(80 x 40 cm)



31x15.5-15 X-Trac
(80 x 40 cm)



15.0/55x17 AS
(85 x 40 cm)



420/55-17 AS
(91x43 cm)



19.0/45x17 AS
(86 x 49 cm)



425/40 B17 GSP
(79x43 cm)



31x15.5-15
Grass (cover)
(80x40 cm)



19.0/45-17 Grass
(cover)
(86x49 cm)



500/45x17.5 Flota
(88 x 50 cm)



12.0/75x18 TR-11
(94 x 30 cm)



445/45x19.5 Kargo
(94 x 45 cm)



445/45-R19.5 GSP
(94 x 45 cm)



500/45x20 AS
(95 x 50 cm)



405/70-20 16PR
MPT/01 AS
(108 x 41 cm)



12.5-20 MPT-01
(104 x 33 cm)



405/70-20
143 EM 01 TL
(108 x 41 cm)



500/45-22.5 GSP
(103 x 51 cm)



600/40-22.5 TR12
(105 x 60 cm)

FIND YOUR GIANT DEALER



SCAN AND SEARCH

**OR CHECK OUR DEALER PAGE
WWW.TOBROCO.COM**



STAY UP-TO-DATE

Meld je aan voor de nieuwsbrief

Sign up for the newsletter

Registrieren sie sich für den newsletter

Inscrivez-vous à notre bulletin d'infos



NEWSLETTER



**TOBROCO MACHINES
THE WHEELLOADER
SPECIALIST!**

Don't miss GIANT news anymore! Click on the newsletter icon below to subscribe for the GIANT newsletter:



NEWSLETTER

Welcome to the website of Tobroco Machines. Tobroco is the manufacturer of Giant wheelloaders.

These are designed and build in our modern factory in Oosterveek (Holland). Thanks to modern technology, development and the best components of Kubota, Bosch Rexroth and Comer, we build the Giant wheelloaders with the utmost care, quality and commitment.



GIANT

Tobroco Machine

[NEWS](#) [PRODUCTS](#) [DEALER](#) [CALENDER](#) [PHOTO ALBUM](#)



GIANT TOBROCO COMPANY MOVIE

Giant wheelloaders Tobroco company movie

